

# WIDEX DREAM™ RIC WITH M-RECEIVER AND **TRUEISP**


## 4 PERFORMANCE LEVELS 440/330/220/110



The WIDEX DREAM RIC uses our unique wireless WidexLink technology and the new TRUE ISP, True-Input technology platform. Program shift on housing and via RC-DEX/M-DEX. Volume control via RC-DEX/M-DEX.  
Uses a size 312 battery.

Minimal to moderately severe hearing losses

### SUGGESTED FITTING RANGE

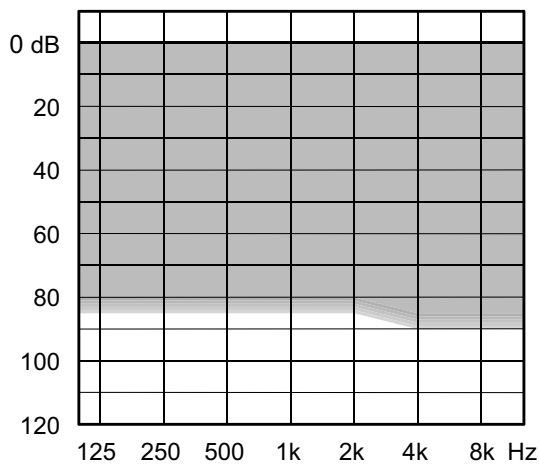

### STANDARD TECHNOLOGY

- **TRUEISP**
- True-Input technology
- WidexLink - Wireless connectivity
- InterEar functionality
- Multiple earware options

KEY FEATURES	440	330	220	110
Performance	xxxxx	xxxx	xxx	xx
Processing channels	15	10	5	3
TruSound Softener	X	X		
HD Locator/Locator	HD	HD	HD	X
Feedback cancelling (IE-InterEar)	IE	IE	IE	
Digital Pinna	X	X		
Speech Enhancer (IE-InterEar)	IE	X		
Personal Audibility Extender	X	X	X	X
Personal Acclimatisation	X	X	X	X
Number of programs*	5	4	3	2
Personal Zen	IE			
InterEar Partner Monitor	IE			
Phone+	X	X		
Reverse focus	X	X	X	
SmartSpeak/SmartTone	X	X	X	X

DEX ACCESSORIES	X	X	X	X
RC-DEX, TV-DEX, M-DEX, FM+DEX, PHONE-DEX <sup>1</sup> , T-DEX <sup>2</sup>				

\* Plus Zen+

<sup>1</sup> Available in Europe


<sup>2</sup> Available in Europe and US/CA/NZ/AUS

# D-FS

## MAXIMUM OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

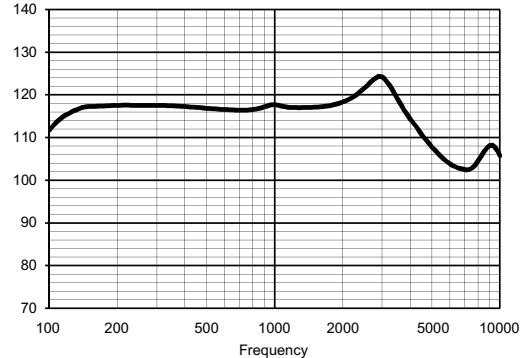

## MAXIMUM OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009


Output dB SPL

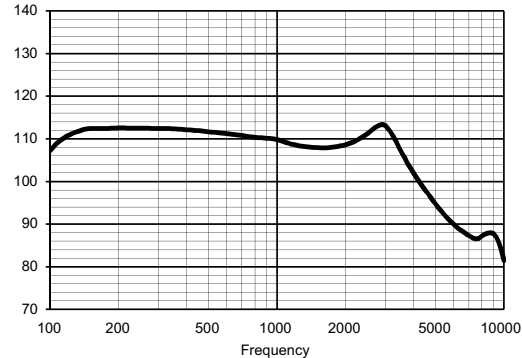

## OUTPUT - EAR SIMULATOR

IEC 60118-0


Output dB SPL

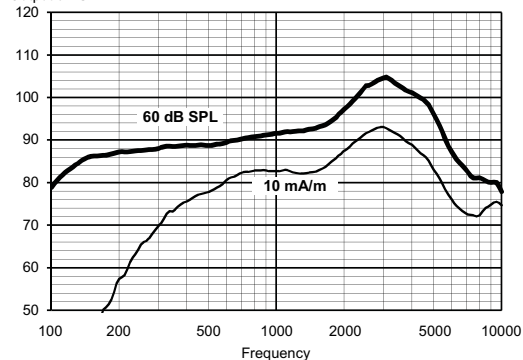

## OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2009

Output dB SPL

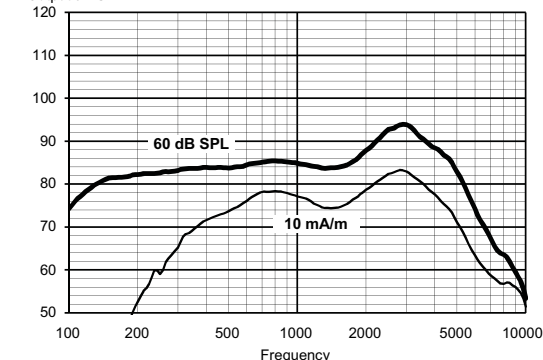

**Technical data** Typical data obtained through standard pure tone measurements.  
Hearing aid set to Compass Test mode 1, unless stated otherwise.  
Measured using a standard ITE coupler without wax guard.

		IEC 60118-0	ANSI S3.22-2009 / IEC 60118-7
OSPL90	2500 Hz	122 dB SPL	111 dB SPL
	Peak	124 dB SPL	113 dB SPL
	Average	118 dB SPL	110 dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	104 dB SPL	94 dB SPL
	Peak	106 dB SPL	95 dB SPL
	Average	93 dB SPL	88 dB SPL
Max gain (Input 50 dB SPL, Compass Max gain test mode)	2500 Hz	69 dB	59 dB
	Peak	71 dB	60 dB
	Average	65 dB	58 dB
Telecoil output (Input 10 mA/m)	2500 Hz	92 dB SPL	82 dB SPL
	Peak	93 dB SPL	83 dB SPL
	Average	83 dB SPL	78 dB SPL
Frequency range		100 Hz - 10000 Hz	100 Hz - 7300 Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz	<2%	<2%
	800 Hz	<2%	<2%
	1600 Hz	<2%	<2%
Equivalent input noise		20 dB SPL	23 dB SPL
Battery drain (stand by)		0.91 mA	0.91 mA
Battery drain		0.93 mA	0.95 mA
Battery life / hours (Type 312 Zn-Air, 145 mAh)		155 (>130)	155 (>125)
Mobile phone immunity		IRIL: -3/-7 dB SPL	U-rating: M4 / T2

